



EACH TANK HALF IS P.N. FM1600-88

16" VENTED LID ASSEMBLY X 2

TANK KEY FS-24D IS REQUIRED BETWEEN TANK SECTIONS.

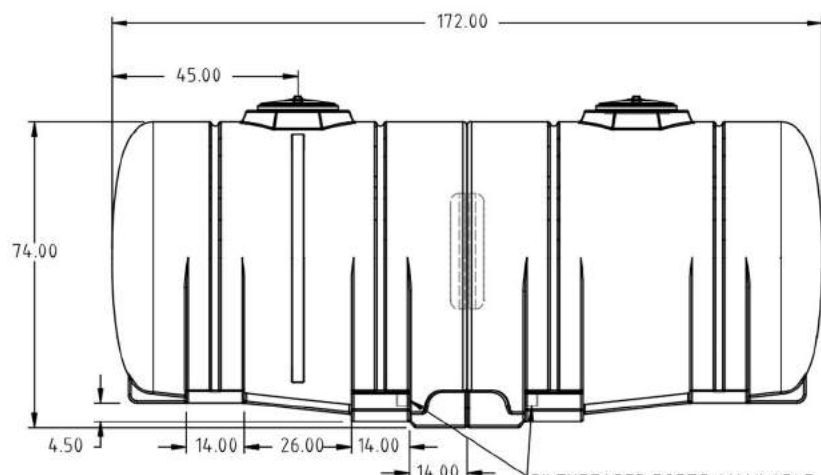


GALLON INDICATORS BOTH SIDES AND ENDS

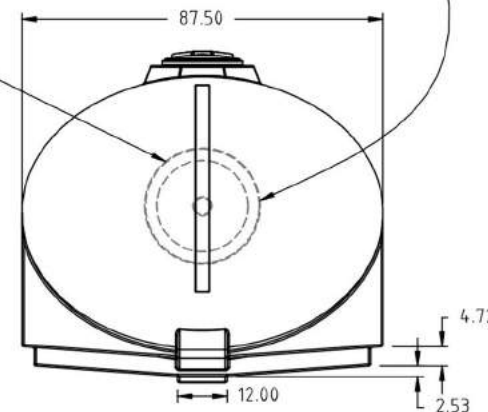

3" THREADED PORTS AVAILABLE HERE ON EACH SIDE. DESIRED PORTS CAN BE DRILLED OPEN FOR USE.

CAUTION: TWO COMPARTMENT TANKS MUST BE PLUMBED TO DRAIN EQUALLY. DO NOT USE TANKS AS INDIVIDUAL STORAGE COMPARTMENTS.

NOTE: 4 HOOPS ARE REQUIRED ON THIS TANK

				DRAWN / DATE REH 03/02/01	MATERIAL HDPE	DESCRIPTION 3200 GAL. SECTIONAL TANK	
B	FM3200-2S WAS FS3200-2S	ADH 3/4/15	3026	APPRD. / DATE REH 03/02/01			
A	ADD CAUTION NOTE	11/2/06					
REV	DESCRIPTION	BY / DATE	CCN				
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT:	NOTES: 1.) AVAILABLE IN NATURAL OR YELLOW COLOR. 2.) NOM. WALL = 0.450		
POLYETHYLENE				SHIPPING WEIGHT:		SCALE	
±1% @ 68°F				FINISH:		N.S.	
METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°						PART NO. 