


U.N. MARKING ON TANK READS:



31H1 / Y / MO. / YR. / USA  
 SNYDER IND. INC.  
 LINCOLN, NE. 4518 / 2510  
 CAPACITY - 1249 LITERS  
 TARE MASS - ACTUAL KG  
 GAUGE TEST PRESSURE - 100 KPA  
 LAST LEAKPROOFNESS TEST - MO. / YR.  
 LAST INSPECTION - MO. / YR.

**330 STANDARD ULTRATAINER "STANDARD PACKAGE OF OPTIONAL EQUIPMENT"**

| ITEM # | DESCRIPTION   | QTY. | PART NUMBER |
|--------|---|------|-------------|
| 1      | TANK - 2 BUNG TANK WITH 6" HEAVY DUTY CAP AND BOTTOM DRAIN HDPE NATURAL. (WITH CAP LANYARD INSERT AND WITH TAMPER EVIDENCE INSERTS MOLDED IN)           | 1    |             |
| 2      | BASE - BASE 330 STANDARD ULTRATAINER HD/BLUE  | 1    |             |
| 3      | TOP PROTECTOR ULTRA HD/BLUE   | 1    |             |
| 4      | PIN ASSEMBLY PURCHASED PLASTIC W/BOLTS FOR ULTRA.   | 1    |             |
| 5      | S.I.I. PROPRIETARY 2" NPS REPLACEABLE BUNG GLASS FILLED POLYETHYLENE W/WITON O-RING SEAL  | 2    |             |
| 6      | 2" NPS RIEKE POLYETHYLENE BUNG PLUGS WITH EPDM FLAT GASKETS   | 2    |             |
| 7      | 6" HEAVY DUTY CAP WITH 2" NPS CENTER OPENING AND EPDM CAP GASKET. EQUIPPED WITH LID TIE   | 1    |             |
| 8      | S.I.I. 2" NPS VACUUM RELIEF VENT WITH EPDM DISK AND FLAT GASKET (AVERAGE GRAVITY FLOW RATE OF 70 GALLONS PER MINUTE)                                    | 1    |             |
| 9      | 2" BANJO STANDARD PORT GLASS FILLED POLYPROPYLENE BOTTOM DRAIN VALVE WITH TEFLON SEATS AND BALL AND 18/8 S.S. BOLTS. INCLUDES DUST CAP AND CAP LANYARD. | 1    |             |

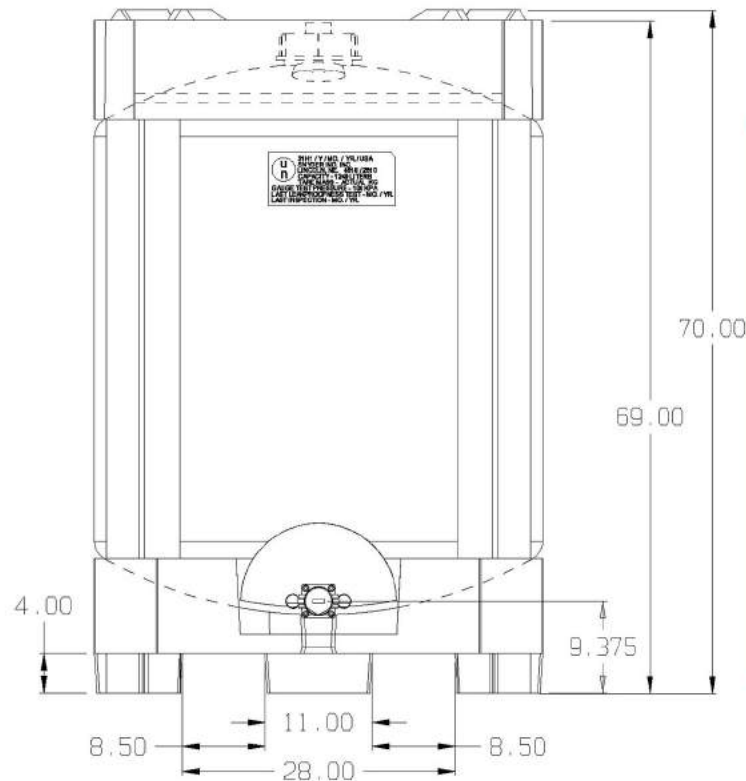

FORK OPENING DIMENSIONS ARE THE SAME ON ALL FOUR SIDES OF THE CONTAINER.

(all dimensions in inches)  
 (all dimensions nominal)

330 GALLON STANDARD ULTRATAINER W/HD 6" CAP

PART # TANK:

REF#: 0000

08/16/02

IBS330-U

(866) 776-8265

PROTANK

sales@protank.com